

Product Information Bulletin


64 Outwater Lane, Garfield, NJ 07026 Ph: 973-340-7889 | Fax: 973-340-7809

Multi-Line Duct Markers

Custom Color Coded Markers



Size: 7 x 4½" (MLDMS)
Lines: Max. 5 per label
Arrows (Left, Right, None)

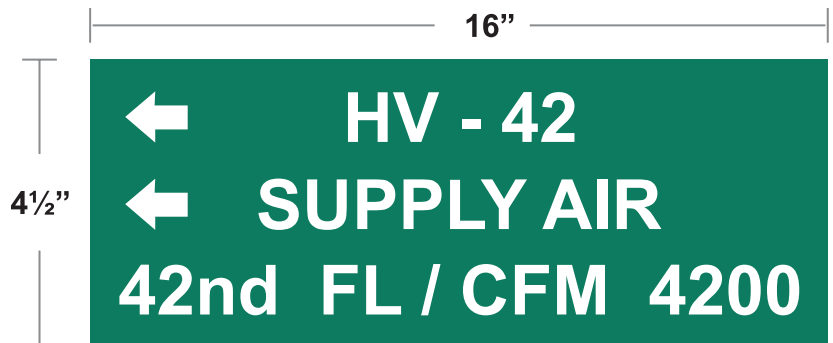

Size: 16 x 4½" (MLDML)
Lines: Max. 5 per label
Arrows (Left, Right, None)

STANDARD COLORS

Green: For cold-air supply ducts.

Yellow: For hot-air supply ducts

Blue: For exhaust-, outside-, relief-, return-, and mixed-air ducts

Red/White

Orange/Black

Brown/White

White/Black

• **LEED Compliance:** This product is in compliance with the Standards set forth by the South Coast Air Quality Management District (SCAQMD) Rule #1168 and the Green Seal Standard, GS-36 for Commercial Adhesives pertaining to Volatile Organic Compounds (VOC). The adhesive backing on this product contains < 4.4 grams / Liter VOC.

Material:

Outdoor Grade 3.2 mil thick high gloss adhesive backed calendered vinyl film, printed using UV and chemical resistant inks, to ensure durability in most commercial / industrial environments.

Use:

Identify duct systems. Each marker is custom made with your specific data. Markers can be supplied with or without arrows. Marker can accommodate 1 to 5 lines of copy. Illustrations above are representative of the type of copy and layout typically ordered.

Adhesive:

Aggressive Solvent Based Adhesive formulated to adhere to a variety of insulated and non insulated pipe surfaces.

Surface Preparation:

Surface must be dry and reasonably clean prior to applying adhesive backed label product. Minimum Surface Temperature 50°F (10°C).

Outdoor Durability: 4 to 5 years Mid Continental US
Abrasion Resistance: Good
Water Resistance: Good
Solvent Resistance: Good
Service Temp: -20°F (-29°C) to 200°F (93°C)
Storage Stability: 2 years at 70°F (21°C) with 50 RH

DATE: / /

JOB: _____

CONTRACTOR: _____