

Product Information Bulletin

64 Outwater Lane, Garfield, NJ 07026 Ph: 973-340-7889 | Fax: 973-340-7809

Engraved Nameplates Briply™ (Regular Plastic)

Material:

Briply™ (Regular Plastic) is a non-directional matte finish flexible blended acrylic extruded sheet, with cap and core permanently fused together. Material is also break resistant, stain resistant, chip proof and shatter proof.

Product Description:

• Brimar's standard engraved plastic nameplates are engraved on one side and available in a variety of colors and sizes to better identify hazards.

Appearance:

• All sides are beveled for a neat finished look.
• Corners are typically provided square.

Application:

• Nameplates are provided with mounting holes (3/16" -5mm- default hole size), adhesive backing or both.

LEED Compliance: Nameplates with adhesive backing are in compliance with the Standards set forth by the South Coast Air Quality Management District (SCAQMD) Rule #1168 and the Green Seal Standard, GS-36 for Commercial Adhesives pertaining to Volatile Organic Compounds (VOC).
• When supplied with adhesive the adhesive backing on this product contains < 5.8 grams / Liter VOC.

Physical Characteristics:

• Standard: 2 Ply 1/16" (1.6mm) thick for engraving on one side.
• Special: 3 Ply 1/16" or 1/8" (1.6mm or 3mm) thick for engraving on one or both sides

Standard Sizes & Shapes*:

<input type="checkbox"/> 2.5 x .75" 64 x 19mm	<input type="checkbox"/> 6 x 4" 152 x 102mm
<input type="checkbox"/> 2.5 x 1" 64 x 25mm	<input type="checkbox"/> 8 x 4" 203 x 102mm
<input type="checkbox"/> 3 x 1" 76 x 25mm	<input type="checkbox"/> 10 x 4" 254 x 102mm
<input type="checkbox"/> 3 x 2" 76 x 51mm	<input type="checkbox"/> 12 x 4" 305 x 102mm
<input type="checkbox"/> 4 x 1.5" 102 x 38mm	<input type="checkbox"/> 12 x 6" 305 x 152mm
<input type="checkbox"/> 4 x 2" 102 x 51mm	<input type="checkbox"/> 12 x 8" 305 x 203mm
<input type="checkbox"/> 4 x 2.5" 102 x 64mm	<input type="checkbox"/> 12 x 12" 305 x 305mm
<input type="checkbox"/> 6 x 2" 152 x 51mm	<input type="checkbox"/> 18 x 12" 457 x 305mm
<input type="checkbox"/> 6 x 3" 152 x 76mm	<input type="checkbox"/> 18 x 18" 457 x 457mm

Max. Temperature:

• -40° F to 200° F
• -40° C to 93° C

Durability:

• Indoor - Indefinite
• Outdoor - Limited

(6-12 months susceptible fading)
Other special products available for exterior durability.

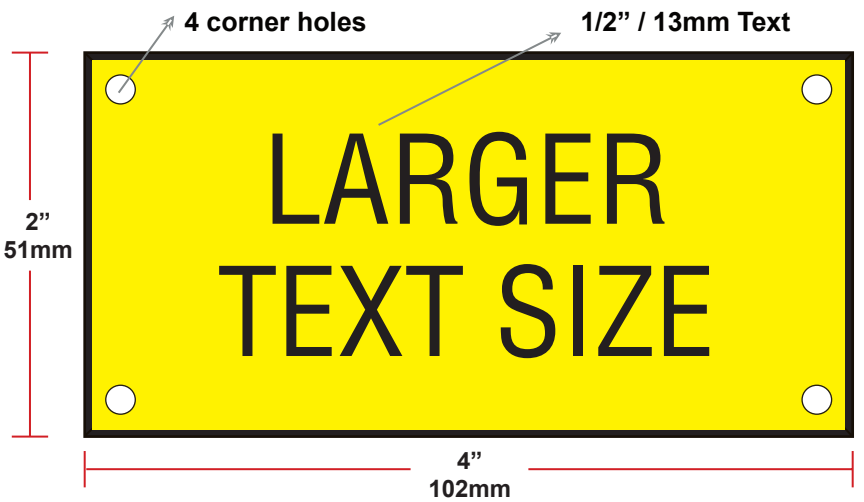
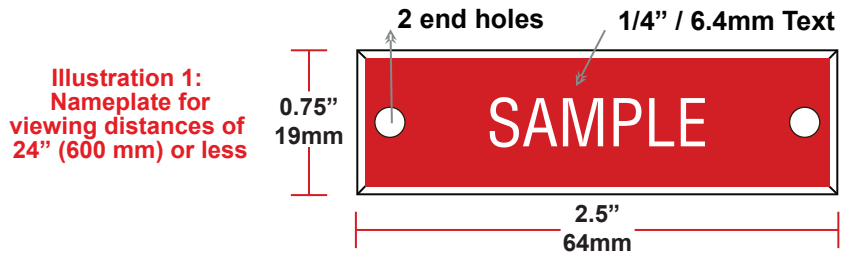


Illustration 2: Nameplate for viewing distances of 72" (1830 mm)

COLORS AVAILABLE

Background	Lettering
Black	White
White	Black
Red	White
Yellow	Black
Blue	White
Green	White
Green	Yellow

Letter Sizes: 1/4" (6.4mm), 3/8" (10mm), 1/2" (13mm), 3/4" (19mm), 1" (25.4mm), 1.25" (32mm), 1.5" (38mm) or Copy to Fit.
Letter sizes are determined by size of tag, number of lines, and number of characters per line.

DATE: ___ / ___ / ___

JOB: _____

CONTRACTOR: _____

Product Information Bulletin

64 Outwater Lane, Garfield, NJ 07026 Ph: 973-340-7889 | Fax: 973-340-7809

Laser Engraved Nameplates Briply Ultra™

Material:

Briply Ultra™ (Laser Engraving Plastic) is a matte or satin finish modified acrylic UV stable sheet, with cap and core permanently fused together. Material is also break resistant, stain resistant, chip proof and shatter proof.

Product Description:

- Brimar's standard engraved plastic nameplates are engraved on one side and available in a variety of colors and sizes to better identify hazards.

Appearance:

- All sides are beveled for a neat finished look.
- Corners are typically provided square.
- Straight edge cut is also available

Application:

- Nameplates are provided with mounting holes (3/16" -5mm- default hole size), adhesive backing or both.

LEED Compliance: Nameplates with adhesive backing are in compliance with the Standards set forth by the South Coast Air Quality Management District (SCAQMD) Rule #1168 and the Green Seal Standard, GS-36 for Commercial Adhesives pertaining to Volatile Organic Compounds (VOC).

- When supplied with adhesive the adhesive backing on this product contains < 5.8 grams / Liter VOC.

Physical Characteristics:

- Standard: 2 Ply 1/16" (1.6mm) thick for engraving on one side.

Standard Sizes & Shapes*:

<input type="checkbox"/> 2.5 x .75" 64 x 19mm	<input type="checkbox"/> 6 x 4" 152 x 102mm
<input type="checkbox"/> 2.5 x 1" 64 x 25mm	<input type="checkbox"/> 8 x 4" 203 x 102mm
<input type="checkbox"/> 3 x 1" 76 x 25mm	<input type="checkbox"/> 10 x 4" 254 x 102mm
<input type="checkbox"/> 3 x 2" 76 x 51mm	<input type="checkbox"/> 12 x 4" 305 x 102mm
<input type="checkbox"/> 4 x 1.5" 102 x 38mm	<input type="checkbox"/> 12 x 6" 305 x 152mm
<input type="checkbox"/> 4 x 2" 102 x 51mm	<input type="checkbox"/> 12 x 8" 305 x 203mm
<input type="checkbox"/> 4 x 2.5" 102 x 64mm	<input type="checkbox"/> 12 x 12" 305 x 305mm
<input type="checkbox"/> 6 x 2" 152 x 51mm	<input type="checkbox"/> 18 x 12" 457 x 305mm
<input type="checkbox"/> 6 x 3" 152 x 76mm	<input type="checkbox"/> 18 x 18" 457 x 457mm

Max. Temperature:

- -40° F to 200° F
- -40° C to 93° C

Durability:

- Indoor - Indefinite
- Outdoor - 2 to 4 years

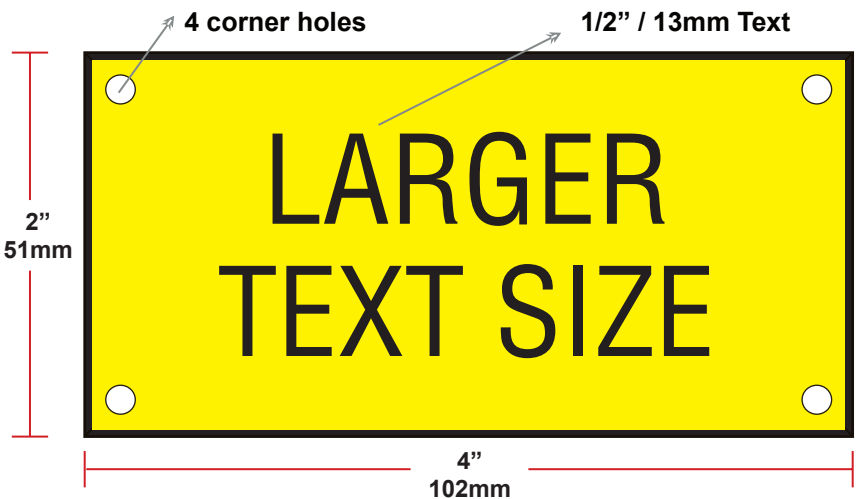
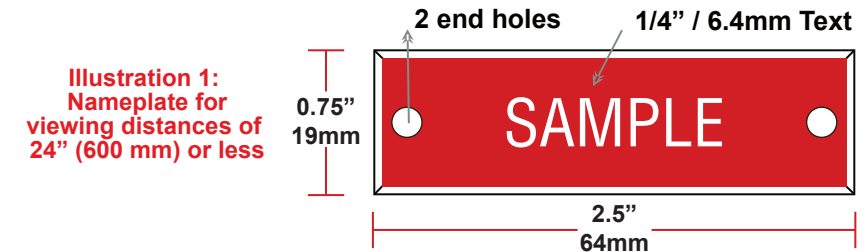


Illustration 2: Nameplate for viewing distances of 72" (1830 mm)

COLORS AVAILABLE

Background	Lettering
Black	White
White	Black
Red	White
Yellow	Black
Blue	White
Green	White

Letter Sizes: 1/4" (6.4mm), 3/8" (10mm), 1/2" (13mm), 3/4" (19mm), 1" (25.4mm), 1.25" (32mm), 1.5" (38mm) or Copy to Fit. Letter sizes are determined by size of tag, number of lines, and number of characters per line.

Dimensional Information:

Maximum plate size is 32 x 18" (965 x 457mm)
Custom sizes also available

(6-12 months susceptible fading)
Other special products available for exterior durability.

DATE: ___ / ___ / ___

JOB: _____

CONTRACTOR: _____