




## Product Information Bulletin

64 Outwater Lane, Garfield, NJ 07026 Ph: 973-340-7889 | Fax: 973-340-7809

### Medical Gas Markers (Rolls and Single Labels)

#### MedGas Roll Style

100 Markers per Roll  
Marker Size = 3 x 3" (76 x 76mm)

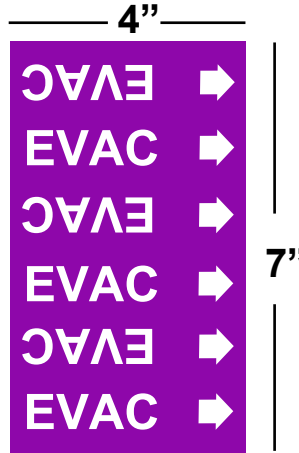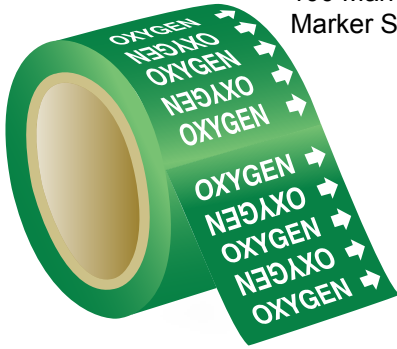

#### MedGas Style M3

1 Card = 2-3/4 x 3" (70 x 76mm)  
5 Mirror Legends  
5 Arrows

#### MedGas Style M2

1 Card = 4 x 7" (102 x 178mm)  
6 Mirror Legends  
6 Arrows

MARKER STYLE	OUTSIDE PIPE DIAMETER	MARKER SIZE	QTY OF MARKERS	SIZE OF LETTERS
M3	3/8" to 3/4" 10 to 19mm	2-3/4 x 3" 70 x 76mm	1 Marker	3/8 inch 10 mm
M2	1" to 2" 25 to 51mm	4 x 7" 102 x 178mm	1 Marker	1/2 inch 13 mm
ROLL	3/8" to 3/4" 10 to 19mm	3 x 3" 76 x 76mm	100/roll	3/8 inch 10 mm

#### Compliance:

- NFPA 99 2015 Health Care Facilities Code "Gas & Vacuum Systems"
- CGA C9 Standard
- **LEED Compliance:** This product is in compliance with the Standards set forth by the South Coast Air Quality Management District (SCAQMD) Rule #1168 and the Green Seal Standard, GS-36 for Commercial Adhesives pertaining to Volatile Organic Compounds (VOC). The adhesive backing on this product contains < 4.4 grams / Liter VOC.

#### Material:

Outdoor Grade 3.2 mil thick high gloss adhesive backed calendered vinyl film, printed using UV and chemical resistant inks, to ensure durability in most commercial / industrial environments.

#### Use:


Identify Medical Gas & Vacuum Systems. Typically installed by wrapping the label completely around the pipe to provide 360° visibility. Legends & Arrows are printed repeatedly in opposite directions for the label to be applied in any direction allowing for proper reading while indicating pipe content flow. Sold in convenient rolls of 100 or as cards containing multiple markers. Both, cards and rolls are back slitted for easy installation.

#### Adhesive:

Aggressive Permanent Adhesive formulated to adhere to a variety of insulated and non insulated pipe surfaces.

#### Standard Colors

(NFPA 99 Table 5.1.11)

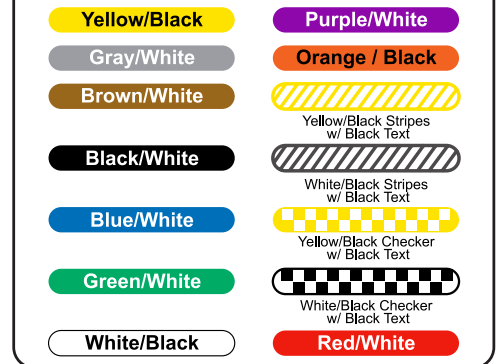

#### Surface Preparation:

Surface must be dry and reasonably clean prior to applying adhesive backed label product.  
Minimum Surface Temperature 50°F (10°C)

**Outdoor Durability:** 4 to 5 years Mid Continental US

**Abrasion Resistance:** Good

**Water Resistance:** Good

**Solvent Resistance:** Good

**Service Temp:** -20°F (-29°C) to 200°F (93°C)

**Storage Stability:** 2 years at 70°F (21°C) with 50 RH

DATE: / /

JOB: \_\_\_\_\_

CONTRACTOR: \_\_\_\_\_