


Product Information Bulletin

64 Outwater Lane, Garfield, NJ 07026 Ph: 973-340-7889 | Fax: 973-340-7809

Markers For Small Pipes Style 18 (Stick On Labels)

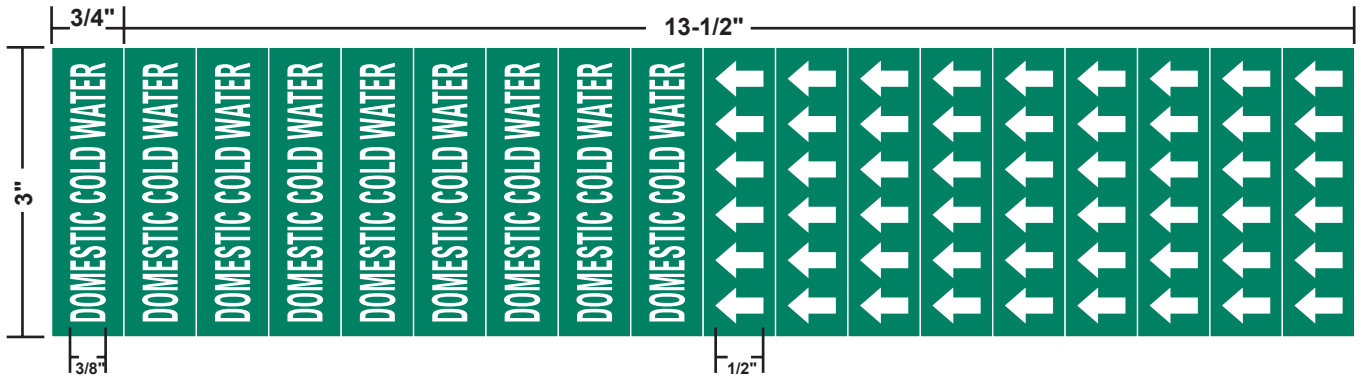

Card Size: 3 x 13-1/2"
 9 Legends at 13 x 3/4" each / Text Height 3/8"
 9 Arrow Bands at 13 x 3/4" each.
 6 Arrows per card at 3/8 wide x 1/2 high



MARKER INSTALLATION

STANDARD COLORS

Flammable & Oxidizing Fluids	Potable, Cooling, Boiler Feed, Waters
Compressed Air	Fire Quenching Fluids
Toxic, Corrosive Fluids	Combustible Fluids
NFPA 99 Colors	NFPA 99 Colors
NFPA 99 Colors	NFPA 99 Colors
NFPA 99 Colors	NFPA 99 Colors

Compliance:

- ANSI Z535.1 "Safety Color Code" and NFPA 99
- LEED Compliance:** This product is in compliance with the Standards set forth by the South Coast Air Quality Management District (SCAQMD) Rule #1168 and the Green Seal Standard, GS-36 for Commercial Adhesives pertaining to Volatile Organic Compounds (VOC). The adhesive backing on this product contains < 4.4 grams / Liter VOC.

Material:

Outdoor Grade 3.2 mil thick high gloss adhesive backed calendared vinyl film, printed using UV and chemical resistant inks, to ensure durability in most commercial / industrial environments.

DIRECTIONAL FLOW

MARKER STYLE	OUTSIDE PIPE DIAMETER	OVERALL CARD SIZE	SINGLE MARKER SIZE	SIZE OF LETTERS	MATCHING ARROW CARD SIZE	SIZE OF ARROW
STYLE 18	Up to 3/4" O.D. Up to 19mm	3 x 13" 76 x 330mm	3 x 3/4" 76 x 19mm	3/8 inch 19.5mm	3 x 3/4" 76 x 19mm	1/2" 13mm

Use:

Identify the content and directional flow of small piping systems. Use Small Markers in conjunction with Matching Arrows.

Adhesive:

Aggressive Permanent Adhesive formulated to adhere to a variety of insulated and non insulated pipe surfaces.

Surface Preparation:

Surface must be dry and reasonably clean prior to applying adhesive backed label product. Minimum Surface Temperature 50°F (10°C).

Outdoor Durability: 4 to 5 years Mid Continental US
 Abrasion Resistance: Good
 Water Resistance: Good
 Solvent Resistance: Good
 Service Temp: -20°F (-29°C) to 200°F (93°C)
 Storage Stability: 2 years at 70°F (21°C) with 50 RH

DATE: / / JOB: _____

CONTRACTOR: _____