


Product Information Bulletin

64 Outwater Lane, Garfield, NJ 07026 Ph: 973-340-7889 | Fax: 973-340-7809

Small Diameter Pipe Markers (Stick On Labels)

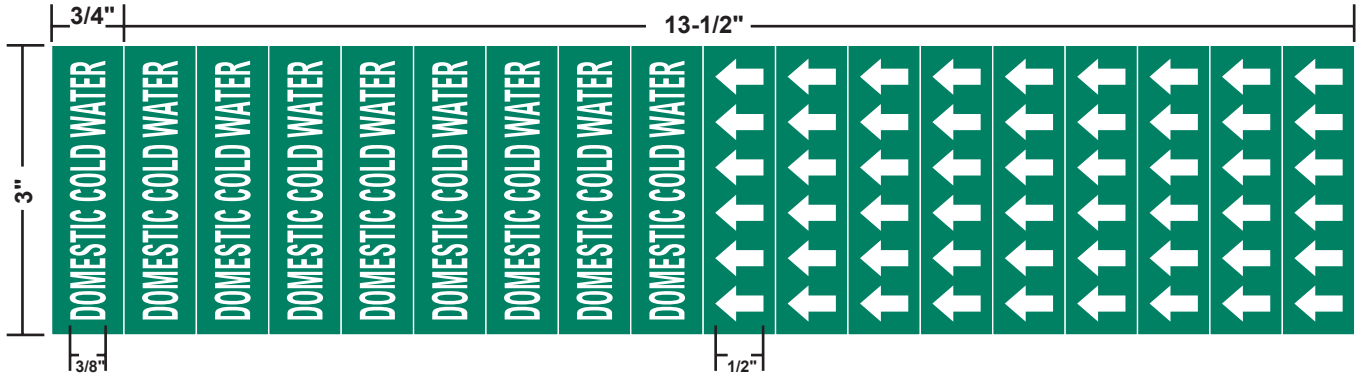

Card Size: 3 x 13-1/2"
 9 Legends at 13 x 3/4" each / Text Height 3/8"
 9 Arrow Bands at 13 x 3/4" each.
 6 Arrows per card at 3/8 wide x 1/2 high



MARKER INSTALLATION

STANDARD COLORS

Flammable, Combustible Oxidizing	Potable, Cooling, or Other Cold or Tepid Water
Compressed Air	Firefighting
Toxic or Corrosive	Steam; or Steam Condensate, Boiler Feedwater, or Other Hot Water
Defined By User	Defined By User
Defined By User	Defined By User
Defined By User	Defined By User

Compliance:

• ANSI Z535.1 "Safety Color Code" and NFPA 99

• **LEED Compliance:** This product is in compliance with the Standards set forth by the South Coast Air Quality Management District (SCAQMD) Rule #1168 and the Green Seal Standard, GS-36 for Commercial Adhesives pertaining to Volatile Organic Compounds (VOC). The adhesive backing on this product contains < 4.4 grams / Liter VOC.

Material:

Outdoor Grade 3.2 mil thick high gloss adhesive backed calendared vinyl film, printed using UV and chemical resistant inks, to ensure durability in most commercial / industrial environments.

DIRECTIONAL FLOW

MARKER STYLE	OUTSIDE PIPE DIAMETER	OVERALL CARD SIZE	SINGLE MARKER SIZE	SIZE OF LETTERS	MATCHING ARROW CARD SIZE	SIZE OF ARROW
STYLE 18	Up to 3/4" O.D. Up to 19mm	3 x 13" 76 x 330mm	3 x 3/4" 76 x 19mm	3/8 inch 19.5mm	3 x 3/4" 76 x 19mm	1/2" 13mm

Use:

Identify the content and directional flow of small piping systems. Use Small Markers in conjunction with Matching Arrows.

Adhesive:

Aggressive Permanent Adhesive formulated to adhere to a variety of insulated and non insulated pipe surfaces.

Surface Preparation:

Surface must be dry and reasonably clean prior to applying adhesive backed label product. Minimum Surface Temperature 50°F (10°C).

Outdoor Durability: 4 to 5 years Mid Continental US

Abrasion Resistance: Good

Water Resistance: Good

Solvent Resistance: Good

Service Temp: -20°F (-29°C) to 200°F (93°C)

Storage Stability: 2 years at 70°F (21°C) with 50 RH

DATE: / /

JOB: _____

CONTRACTOR: _____