




Product Information Bulletin

64 Outwater Lane, Garfield, NJ 07026 Ph: 973-340-7889 | Fax: 973-340-7809

Premium Arrow Banding Tape

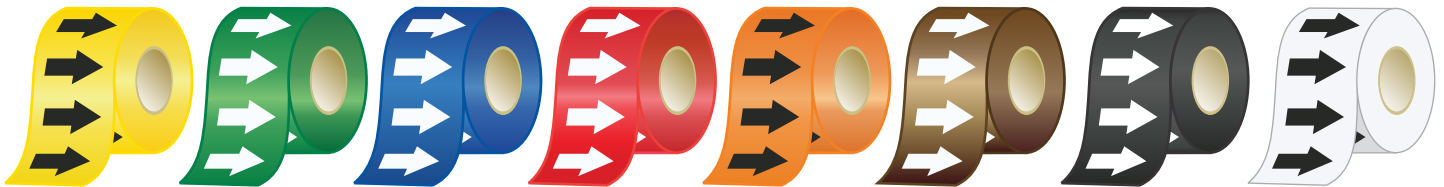

When determining how much tape to order be aware of the following:

- Premium Arrow Banding Tape is 30 yards long.
- Most people will apply tape on both ends of the pipe marker resulting in 2 bands per marker see typical installation image above)
- Table below provides the quantity of **bands** for an specific O.D. (Outside Diameter), not the quantity of markers.



Typical Installation

EZ Marker with Arrow Banding Tape

Pipe Diameter	1" (25.4mm)	2" (51mm)	3" (76mm)	4" (102mm)	5" (127mm)	6" (152mm)	7" (178mm)	8" (203mm)	9" (229mm)	10" (254mm)	12" (305mm)
30 Yard (90')	308	154	102	77	61	51	44	38	34	30	25

STANDARD COLORS

Flammable & Oxidizing Fluids	Potable, Cooling, Boiler Feed, Waters
Compressed Air	Fire Quenching Fluids
Toxic, Corrosive Fluids	Combustible Fluids
NFPA 99 Colors	NFPA 99 Colors

* New 2015 color classification

Tape Size	Recommended Pipe Size	Marker Style
1" x 30 yds. 25.4mm x 27.4m	Up to 2-3/8" Up to 60mm	1XSM & 1SM
2" x 30 yds. 51mm x 27.4m	2-1/2" to 7-3/8" 64 to 187mm	1
4" x 30 yds. 102mm x 27.4m	Over 8" Over 203mm	1LG & 1XLG

Compliance:

- ANSI / ASME A13.1-2015 "Scheme for the Identification of Piping Systems"
- ANSI Z535.1 "Safety Color Code"
- **LEED Compliance:** This product is in compliance with the Standards set forth by the South Coast Air Quality Management District (SCAQMD) Rule #1168 and the Green Seal Standard, GS-36 for Commercial Adhesives pertaining to Volatile Organic Compounds (VOC). The adhesive backing on this product contains < 4.4 grams / Liter VOC.

Material:

Outdoor Grade 3.2 mil thick high gloss adhesive backed calendared vinyl film, printed using UV and chemical resistant inks, to insure durability in most commercial / industrial environments.

Use:

Liner mounted adhesive tape. Banding & Arrow Tapes are often used in conjunction with EZ Pipe Markers to identify directional flow of pipe content and to fully comply with ANSI /ASME A13.1 2015. Tape provides a 360° visible color code and locator for the actual marker, which indicates pipe content.

Adhesive:

Aggressive Solvent Based Adhesive formulated to adhere to a variety of insulated and non insulated pipe surfaces.

Surface Preparation:

Surface must be dry and reasonably clean prior to applying adhesive backed label product. Minimum Surface Temperature 50° F (10°C).

Outdoor Durability: 4 to 5 years Mid Continental US

Abrasion Resistance: Good

Water Resistance: Good

Solvent Resistance: Good

Service Temp: -20°F (-29°C) to 200°F (93°C)

Storage Stability: 2 years at 70°F (21°) with 50 RH

DATE: ___ / ___ / ___ JOB: _____

CONTRACTOR: _____


MANUFACTURER'S CERTIFICATE OF CONFORMANCE

Brimar Industries, Inc. (d.b.a. www.SafetySign.com)
64 Outwater Lane
Garfield, NJ 07026

Brimar Industries's **Arrow Banding Tape Sizes 1", 2" and 4"** are produced 100% in the United States of America using accepted practices and quality assurance procedures to comply with specifications of regulatory agencies.

Manufacturer's Product Description: Outdoor Grade 3.2 mil thick high gloss adhesive backed calendered vinyl film, printed using UV and chemical resistant inks, to insure durability in most commercial / industrial environments.

Adhesive: Aggressive Solvent Based Adhesive formulated to adhere to a variety of insulated and non insulated pipe surfaces. Surface must be dry and reasonably clean prior to applying adhesive backed label product.

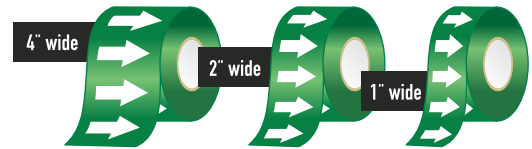

Use: Liner mounted adhesive tape. Banding & Arrow Tapes are often used in conjunction with EZ Pipe Markers to identify directional flow of pipe content and to fully comply with ANSI /ASME A13.1 2015. Tape provides a 360° visible color code and locator for the actual marker, which indicates pipe content.

Product Type: Pipe Marker Arrow Banding Tape

Manufacturer's Product Numbers: 1" - ABG1 / 2" - ABG2 / 4" - ABG4

Meets Specifications:

- ANSI / ASME A13.1-2015 "Scheme for the Identification of Piping Systems"
- ANSI Z535.1 "Safety Color Code"
- LEED Compliance: This product is in compliance with the Standards set forth by the South Coast Air Quality Management District (SCAQMD) Rule #1168 and the Green Seal Standard, GS-36 for Commercial Adhesives pertaining to Volatile Organic Compounds (VOC). The adhesive backing on this product contains < 4.4 grams / Liter VOC.

Respectfully yours,



Michael Schoenfeld
Chief Operating Officer
Brimar Industries, Inc.
800-2746271
michael@brimar.com