

Product Information Bulletin

64 Outwater Lane, Garfield, NJ 07026 Ph: 973-340-7889 | Fax: 973-340-7809

BULLET MARKER

The Brimar Bullet Marker provides a 360° warning message that is sure to demand attention. Various color combinations of bullet heads and poly posts can specify water, sewer, gas, petroleum or fiber optic lines below, while also complementing your company’s colors. The bullet head and post are manufactured from specially formulated, UV protected High Density Polyethylene (HDPE), which makes Brimar Bullet Markers the ultimate choice for outdoor durability. Perfect marking choice due to low conductivity properties. Multiple anchor options are also available for this product to ensure maximum stability.



YELLOW BULLET HEAD ON WHITE POST

360° VISIBILITY

- STANDARD LENGTHS ARE 6’ AND 8’.
- CUSTOM LENGTHS ARE ALSO AVAILABLE.

BULLET SLEEVE AND CAP COLORS
CONFORMS TO APWA UNIFORM COLOR STANDARDS
CUSTOM COLORS AVAILABLE




ANCHOR OPTION:

- THE **BRIMAR BARB ANCHOR** IS 4” LONG AND IS MANUFACTURED FROM 0.062 RIGID PVC. IT IS SECURELY FASTENED TO THE HDPE POST USING A SCREW.



CLIP ANCHOR

TECHNICAL SPECIFICATIONS:

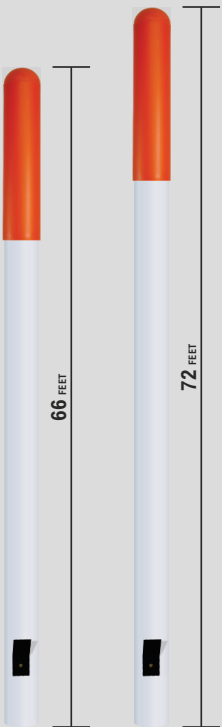

| MATERIAL | HIGH DENSITY POLYETHYLENE (HDPE) |
|---------------------------------|---|
| WALL THICKNESS | .125 - .318 |
| DENSITY | .952 TO .953 |
| LINEAR EXPANSION | 12 |
| ELONGATION AT BREAK (%) | 150 |
| STRAIN AT YIELD (%) | 15 |
| WATER ABSORPTION (%) | 0.02 |
| OXYGEN INDEX (%) | 17 |
| FLAMMABILITY UL94 | HB |
| VOLUME RESISTIVITY (log ohm.cm) | 17 |
| DIELECTRIC STRENGTH (MV/m) | 22 |
| DISSIPATION FACTOR 1 kHz | 2.3 |
| HDT @ 0.45 Mpa (c) | 75 |
| HDT @ 1.80 Mpa (C) | 46 |
| SERVICE TEMPERATURE | -70 - 320 FAHRENHEIT - ASTM D746 |
| TENSILE STRENGTH (TS) | MINIMUM (TS) OF 2700 POUNDS PER SQUARE INCH AS MEASURED BY ASTM D638. (SEPARATION RATE = 2 IN/MIN) |

INSTRUCTIONS FOR BULLET MARKER INSTALLATION

(ALWAYS CALL 811 BEFORE DIGGING)

REQUIRED TOOLS

Shovel or Post Hole Digger



1. DIG HOLE 18" DEEP / 6" WIDE



2. PLACE MARKER INTO GROUND



3. BACKFILL DIRT AND TAMP



INSTRUCTIONS FOR BULLET MARKER INSTALLATION


(ALWAYS CALL 811 BEFORE DIGGING)

REQUIRED TOOLS

U-Channel Post and Hardware



1. PLACE U-CHANNEL POST IN GROUND TO DESIRED HEIGHT

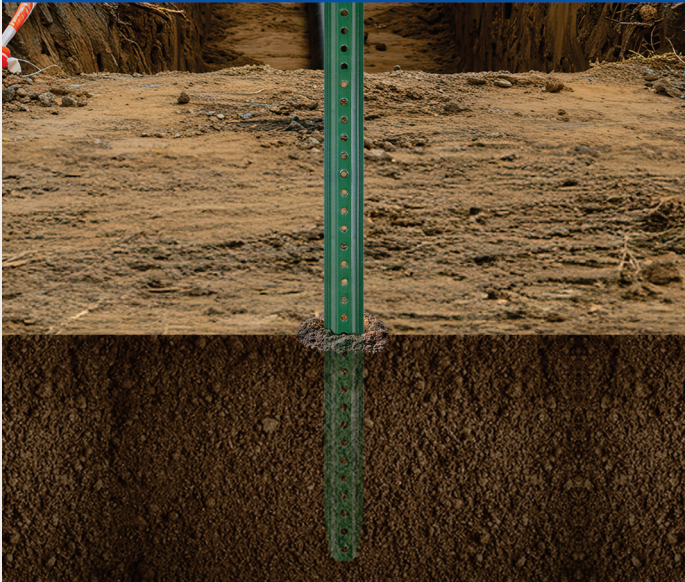

2. ATTACH MARKER TO U-CHANNEL POST USING AVAILABLE HARDWARE



3. CROSS-SECTIONAL VIEW (LOOKING UP FROM BOTTOM OF MARKER)

