

## Product Information Bulletin

64 Outwater Lane, Garfield, NJ 07026 Ph: 973-340-7889 | Fax: 973-340-7809

### Duct Markers


#### 1 Duct Marker Rolls

##### Style: DMS on a Roll



#### 2 Duct Marker Cards

##### Style: DMS

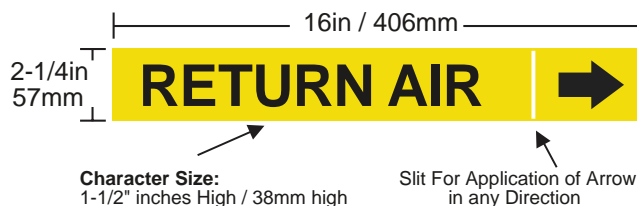

##### Style: DML



MARKER STYLE	DUCT SIZE	MARKER DIMENSIONS	CHARACTER SIZE
ROLL	Up to 24" Up to 610mm	16 x 2 1/4" 406 x 57mm (50 markers/roll)	1-1/2" 38mm
DMS	Up to 24" Up to 610mm	16 x 2 1/4" 406 x 57mm	1-1/2" 38mm
DML	Over 24" Over 610mm	24 x 4" 610 x 102mm	2 1/2" 63.5mm

### STANDARD COLORS

Green: For cold-air supply ducts.

Yellow: For hot-air supply ducts

Blue: For exhaust-, outside-, relief-, return-, and mixed-air ducts

• **LEED Compliance:** This product is in compliance with the Standards set forth by the South Coast Air Quality Management District (SCAQMD) Rule #1168 and the Green Seal Standard, GS-36 for Commercial Adhesives pertaining to Volatile Organic Compounds (VOC). The adhesive backing on this product contains < 4.4 grams / Liter VOC.

#### Material:

Outdoor Grade 3.2 mil thick high gloss adhesive backed calendered vinyl film, printed using UV and chemical resistant inks, to ensure durability in most commercial / industrial environments.

#### Use:

Identify duct systems. Duct markers are provided with a slitted arrow for easy application and identification of the pipe content directional flow. Sold in convenient rolls of 50 markers or as individual cards.

#### Adhesive:

Aggressive Solvent Based Adhesive formulated to adhere to a variety of insulated and non insulated pipe surfaces.

#### Surface Preparation:

Surface must be dry and reasonably clean prior to applying adhesive backed label product. Minimum Surface Temperature 50°F (10°C).

Outdoor Durability: 4 to 5 years Mid Continental US

Abrasion Resistance: Good

Water Resistance: Good

Solvent Resistance: Good

Service Temp: -20°F (-29°C) to 200°F (93°C)

Storage Stability: 2 years at 70°F (21°C) with 50 RH

DATE: / /

JOB: \_\_\_\_\_

CONTRACTOR: \_\_\_\_\_