


64 Outwater Lane, Garfield, NJ 07026 Ph: 973-340-7889 | Fax: 973-340-7809

# **STENCILS**

### **Standard Stencil Characters**

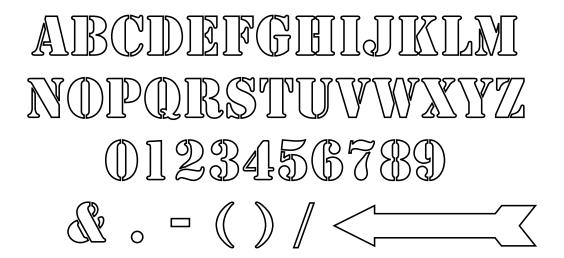

#### Use:

Marking all types of piping and equipment. Use with Stencil paints or Stencil Inks

### **Materials**

Polyester: Matte film 4 mil thickness.

**Polyester:** Offers superior durability and flexibility. Excellent for indoor and outdoor use. Can easily be wiped off and does not absorb moisture.

### Letter Size:

Standard sizes 1/2", 3/4", 1", 1-1/4", 1-1/2", 2", 2-1/2", 3", 3-1/2", 4" (13mm, 19mm, 25.4mm, 32mm, 38mm, 51mm, 64mm, 76mm, 89mm, 102mm)

Other Sizes and Custom shapes are available.

HOT WATER SUPPLY
------------------


DATE: / /	JOB:
CONTRACTOR:	



64 Outwater Lane, Garfield, NJ 07026 Ph: 973-340-7889 | Fax: 973-340-7809

# **BRASS INTERLOCKING STENCILS**

### **Stencil Characters**

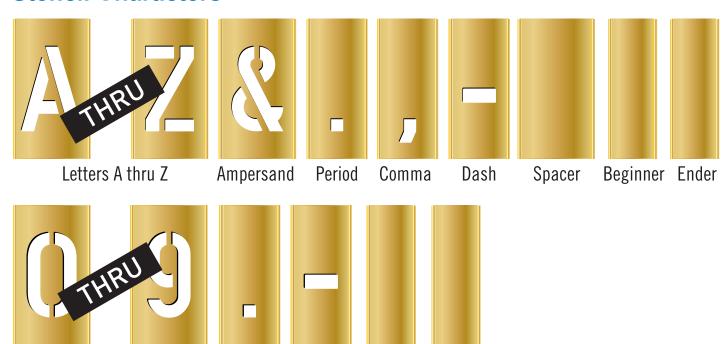

Beginner Ender

#### Use:

Marking all types of piping and equipment. Use with Stencil paints or Stencil Inks

Period

### **Materials**

Brass: .007 mil thick

Numbers 0 thru 9

Offers superior durability, ideal for jobs that required several different legends such as equipment identification.

Dash

**Letter Sets consists of:** A thru Z, &, period (.), comma (,) dash (-), spacer, beginner and ender.

**Number Sets consists of:** 0,1, 2, 3, 4, 5, 6, 7, 8, 9, period (.),dash (-), beginner and ender.

#### **Character Sizes Available:**

Standard sizes 3/4", 1", 1-1/2", 2", 3" (19mm, 25.4mm, 38mm, 51mm, 76mm)

DATE: / /	JOB:
CONTRACTOR:	



64 Outwater Lane, Garfield, NJ 07026 Ph: 973-340-7889 | Fax: 973-340-7809

# **Stencil Paint**

Specifically designed spray head makes for quick and easy permanent marking on piping and other commonly marker surfaces.

### Suggested Uses:

Forestry

Petrochemical

Mining

Lumber

Screen enclosures


### **Benefits**

- Economical
- Lower Flammability
- Water based formula provides reduced flammability.
- Narrow concentrated spray
- High opacity and pigment content
- Non-clogging
- Long lasting paint that will not wash away with water
- VOC compliant (makes it safer for the environment)
- Net Weight 11 oz. / Weight by volume 15.7 oz.

### Packaging:

- · Container 16 fluid ounce can
- Shipping Classification Consumer Commodity ORM-D, UN 1950
- Hazard Class 2.1

Properties:		Dry Time*:	
Flammability	"Flammable"	To touch	10 minutes
Flash point	-4F	To handle	45 minutes
Specific Gravity Solids Content	0.80 ~18%	*At 72° F, 50% humidity, 1.5 mil thickness	
VOC content MIR value	~56%, cannot exceed 60% ~1.10, cannot exceed 1.20	**Curing/Recoat time is extended with multiple coats and excessively thick coats**	
HAPs content	19%	Gloss*:	Flat, <15
Storage Temperature	40°-90° F	*as measured on a 60° gloss meter	
Application Temperature Durability Abrasion Resistance Heat Resistance Resin System Shelf life Food contact rating	50° -100° F Good Good 250° F V.T. Alkyd Guaranteed for 2 years No	COLORS  White Black Green Red Yellow Blue	PART# HGP-W HGP-BLK HGP-G HGP-R HGP-Y HGP-B
DATE: / /	JOB:		
CONTRACTOR:			

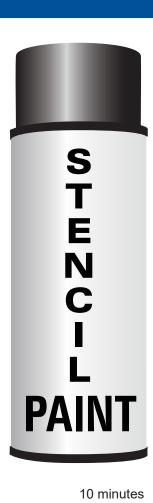



64 Outwater Lane, Garfield, NJ 07026 Ph: 973-340-7889 | Fax: 973-340-7809

# Stencil Ink

Industrial Spray Inks are useful for permanent, waterproof, fast-drying bold marks on any surface.

#### **Benefits**

- Bold, brilliant, lead-free, pigment colors for high contrast marking
- May be used on any surface
- For stenciling, color coding and identification marking
- Permanent, quick drying, weatherproof, low odor level
- Meets Federal Ink Specs for water and weather resistance
- Complies with A-A-208D Performance Specs for black, white and red
- Quick drying formula results in little running and minimum misting.
- Flat finish provides and easy to read mark.

### Packaging:

- Container 14 fluid ounces can (414 cm)
- Net weight: 0.69 lbs (11 oz.) per can

### **Physical Characteristics**

- Fragrance: Solvent Odor
- Spray Pattern: Wet, Medium Mist
- Shelf Life: 2 years from date of manufacture (Julian date stamped on bottom of can)

### Regulatory

- Chlorofluorocarbon (CFC): None
- Recyclable Packaging: Yes
- Regulated By: 29 CFR 1910.1200
- DOT Hazard Class: Limited Quantity
- Shipping Name: Aerosols, Flammable UN 1950
- 24 Hour Medical Emergency: 1-800-535-5053 / 1-352-323-3500

