

Product Information Bulletin

64 Outwater Lane, Garfield, NJ 07026 Ph: 973-340-7889 | Fax: 973-340-7809

STENCILS

Standard Stencil Characters



Use:

Marking all types of piping and equipment. Use with Stencil paints or Stencil Inks

Materials

Polyester: Matte film 4 mil thickness.

Polyester: Offers superior durability and flexibility. Excellent for indoor and outdoor use. Can easily be wiped off and does not absorb moisture.

Letter Size:

Standard sizes 1/2", 3/4", 1", 1-1/4", 1-1/2", 2", 2-1/2", 3", 3-1/2", 4" (13mm, 19mm, 25.4mm, 32mm, 38mm, 51mm, 64mm, 76mm, 89mm, 102mm)

Other Sizes and Custom shapes are available.



DATE: ___ / ___ / ___

JOB: _____


CONTRACTOR: _____

Product Information Bulletin

64 Outwater Lane, Garfield, NJ 07026 Ph: 973-340-7889 | Fax: 973-340-7809

BRASS INTERLOCKING STENCILS

Stencil Characters

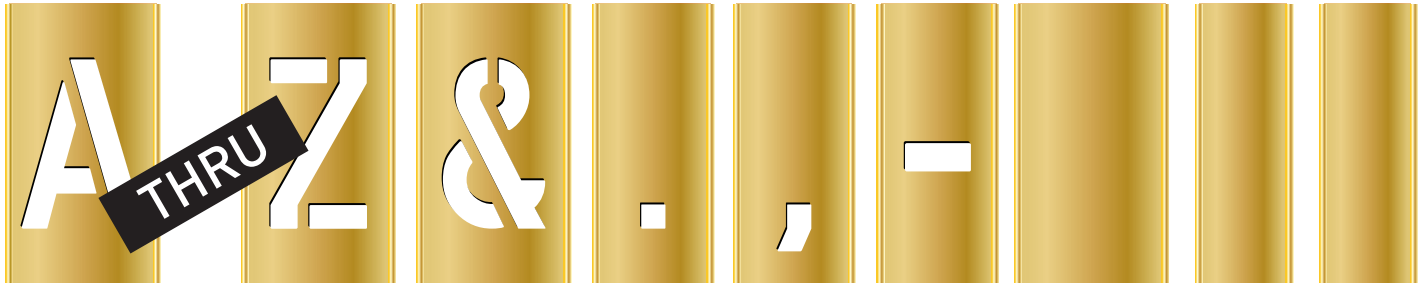

Letters A thru Z

Ampersand

Period


Comma

Dash

Spacer

Beginner

Ender

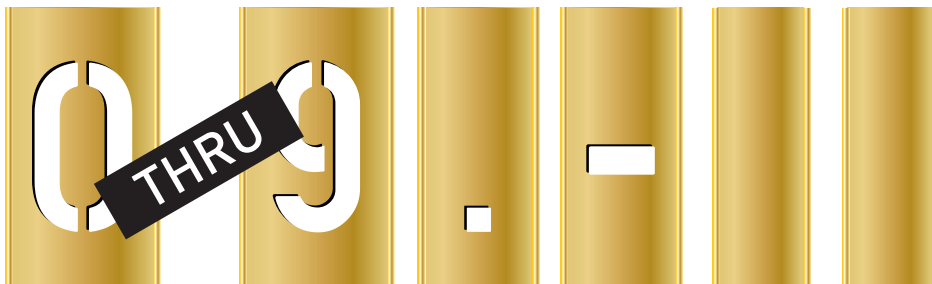

Numbers 0 thru 9

Period

Dash

Beginner

Ender

Use:

Marking all types of piping and equipment. Use with Stencil paints or Stencil Inks

Materials

Brass: .007 mil thick

Offers superior durability, ideal for jobs that required several different legends such as equipment identification.

Letter Sets consists of: A thru Z, &, period (.), comma (,) dash (-), spacer, beginner and ender.

Number Sets consists of: 0,1, 2, 3, 4, 5, 6, 7, 8, 9, period (.),dash (-), beginner and ender.

Character Sizes Available:

Standard sizes 3/4", 1", 1-1/2", 2", 3" (19mm, 25.4mm, 38mm, 51mm, 76mm)

DATE: ___ / ___ / ___

JOB: _____

CONTRACTOR: _____

Product Information Bulletin

64 Outwater Lane, Garfield, NJ 07026 Ph: 973-340-7889 | Fax: 973-340-7809

Stencil Paint

Specifically designed spray head makes for quick and easy permanent marking on piping and other commonly marker surfaces.

Suggested Uses:

- Forestry
- Petrochemical
- Mining
- Lumber
- Screen enclosures

Benefits

- Economical
- Lower Flammability
- Water based formula provides reduced flammability.
- Narrow concentrated spray
- High opacity and pigment content
- Non-clogging
- Long lasting paint that will not wash away with water
- VOC compliant (makes it safer for the environment)
- Net Weight 11 oz. / Weight by volume 15.7 oz.

Packaging:

- Container 16 fluid ounce can
- Shipping Classification Consumer Commodity ORM-D, UN 1950
- Hazard Class 2.1

Properties:

Flammability	"Flammable"
Flash point	-4F
Specific Gravity	0.80
Solids Content	~18%
VOC content	~56%, cannot exceed 60%
MIR value	~1.10, cannot exceed 1.20
HAPs content	19%
Storage Temperature	40°-90° F
Application Temperature	50° -100° F
Durability	Good
Abrasion Resistance	Good
Heat Resistance	250° F
Resin System	V.T. Alkyd
Shelf life	Guaranteed for 2 years
Food contact rating	No


Dry Time*:

To touch	10 minutes
To handle	45 minutes
*At 72° F, 50% humidity, 1.5 mil thickness	

Curing/Recoat time is extended with multiple coats and excessively thick coats

Gloss*: Flat, <15
*as measured on a 60° gloss meter

COLORS		PART#
<input type="checkbox"/>	White _____	HGP-W
<input type="checkbox"/>	Black _____	HGP-BLK
<input type="checkbox"/>	Green _____	HGP-G
<input type="checkbox"/>	Red _____	HGP-R
<input type="checkbox"/>	Yellow _____	HGP-Y
<input type="checkbox"/>	Blue _____	HGP-B

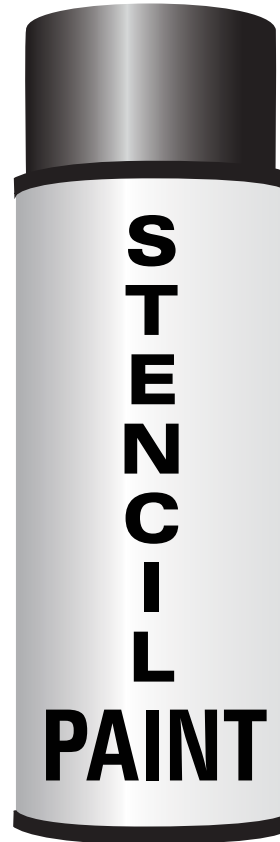

DATE: ____ / ____ / ____ JOB: _____

CONTRACTOR: _____

Product Information Bulletin

64 Outwater Lane, Garfield, NJ 07026 Ph: 973-340-7889 | Fax: 973-340-7809

Stencil Ink

Industrial Spray Inks are useful for permanent, waterproof, fast-drying bold marks on any surface.

Benefits

- Bold, brilliant, lead-free, pigment colors for high contrast marking
- May be used on any surface
- For stenciling, color coding and identification marking
- Permanent, quick drying, weatherproof, low odor level
- Meets Federal Ink Specs for water and weather resistance
- Complies with A-A-208D Performance Specs for black, white and red
- Quick drying formula results in little running and minimum misting.
- Flat finish provides and easy to read mark.

Packaging:

- Container 14 fluid ounces can (414 cm)
- Net weight: 0.69 lbs (11 oz.) per can

Physical Characteristics


- Fragrance: Solvent Odor
- Spray Pattern: Wet, Medium Mist
- Shelf Life: 2 years from date of manufacture
(Julian date stamped on bottom of can)

Regulatory

- Chlorofluorocarbon (CFC): None
- Recyclable Packaging: Yes
- Regulated By: 29 CFR 1910.1200
- DOT Hazard Class: Limited Quantity
- Shipping Name: Aerosols, Flammable UN 1950
- 24 Hour Medical Emergency: 1-800-535-5053 / 1-352-323-3500

Compliance:

Commercial Item Description A-A-208D Ink, Marking,
Stencil, Opaque (Porous and Non-Porous Surfaces)

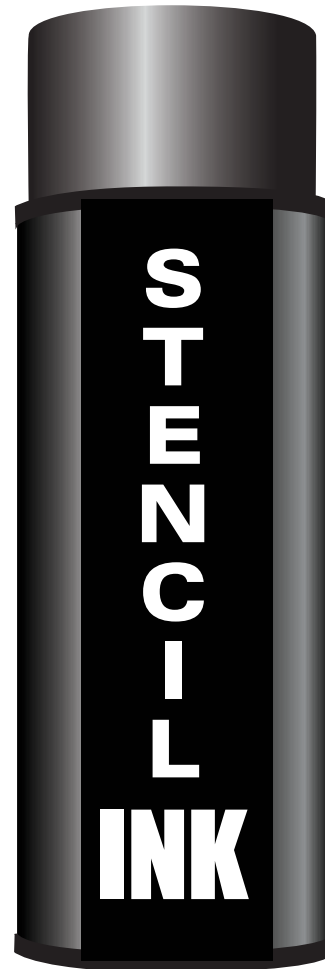

COLORS	PART#
<input type="checkbox"/> White _____	INK-W
<input type="checkbox"/> Black _____	INK-BLK
<input type="checkbox"/> Red _____	INK-R
<input type="checkbox"/> Yellow _____	INK-Y

DATE: ____ / ____ / ____ JOB: _____

CONTRACTOR: _____